



Tuotekoodi

JPL-DIMRC5-250VA-6

Tuotekuvaus


LED-valonsäädin 5-250VA-6

Asennukseen liittyvät huomiot


1. Asennuksen saa suorittaa vain pätevä sähköasentaja.
2. Asennuskohde on tehtävä jännitteettömäksi ennen asennusta. Tarkistus jännitemittarilla.
3. Kytke tulevat ja lähtevät vaihejohtimet niille varattuihin paikkoihin, ks. kytkentäkuvat. Nollajohdin tulee kytkeä suoraan valaisimeen.
4. Asenna valonsäädin rasiaan. Johtoja ei saa jäädä puristuksiin tai huonosti kiinnitetyiksi.
5. Voit tarvittaessa säätää minimikuormaa valaisinten himmennuksen optimoimiseksi.
6. Kiinnitä kehykset ja kiertonuppi.

HUOM. Ohjeiden noudattamatta jättämisestä voi olla vakavia seurauksia. Asennettaessa huolehdittavasta oikeasta asennustavasta.

Normaali kytkentä

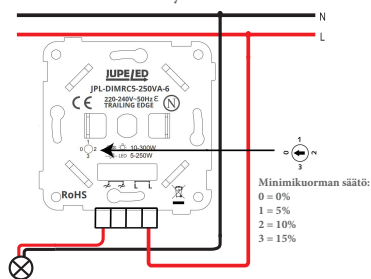

Porraskytkentä

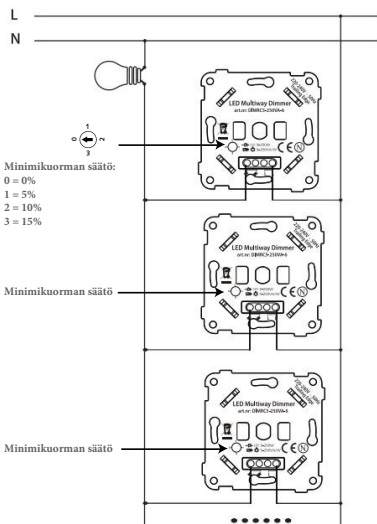

LED-valonsäädin 5-250VA-6

Käyttöjännite	220-240 V
Taajuus	50 Hz
Maksimikuorma (LED)	250 VA
Maksimikuorma (muut)	250 VA
Minimikuorma	5 VA
Kotelointiluokka	IP20
Koko (ilman peitelevyä)	71 x 71 x 41 mm
Koko (peitelevyn kanssa)	84 x 84 x 43 mm
Asennussyvyys	23mm
Himmennystapa	Laskevan reunan säätö (RC)
Suojaukset	Oikosulku-, ylikuumentumis- ja ylikuormitussuojaus

Asennettaessa ei tarvita nollajohdinta.

Maksimikuorman laskennassa on huomioitava valaisimien tehokerroin.

Liitäntäteho = valaisimien lukumäärä x valaisimen teho / tehokerroin.


Soveltuu yleisimpiin kalustemalleihin:

ABB Jussi ja Impressivo
 Schneider Exxact
 Berker
 ELKO RS16

Porraskytkentä:

Normaalin porraskytkennän lisäksi JPL-DIMRC5-250VA-6

himmmentimiä voi käyttää samalle valoryhmälle siten, että valoryhmää himmennetään useammasta paikasta.


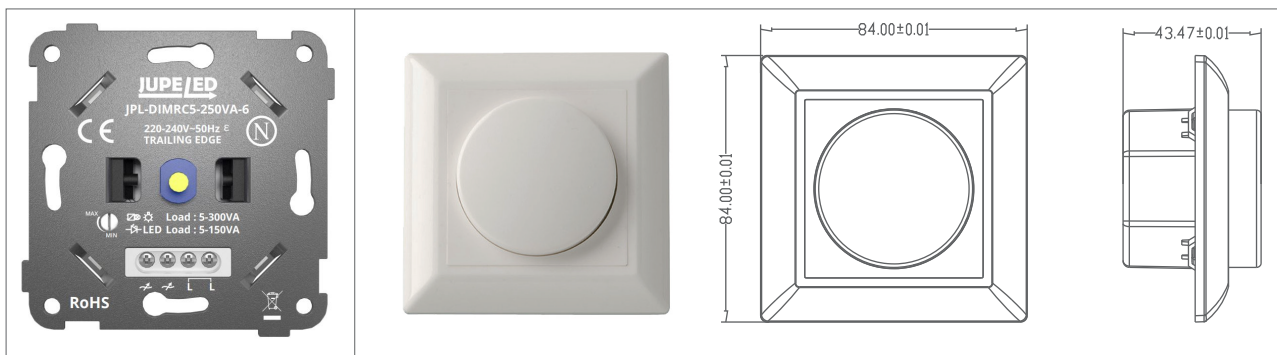


Item nr.	Item description
JPL-DIMRC5-250VA-6	LED DIMMER SWITCH 5-150VA

Installation notes

1. Installation may only be done by a qualified electrician.
2. Stop the current.
3. Connect incoming and outgoing conductors to the locations you see in the wiring diagrams. The earthed neutral should be directly connected to the light.
4. Install the dimmer in the equipment box. There can't be cables camped after installation.
5. If necessary, you can adjust the minimum brightness to optimize dimming performance.
6. Attach the frames and knob.

Warning! Failure to follow these instructions can result in serious injury or equipment damage.

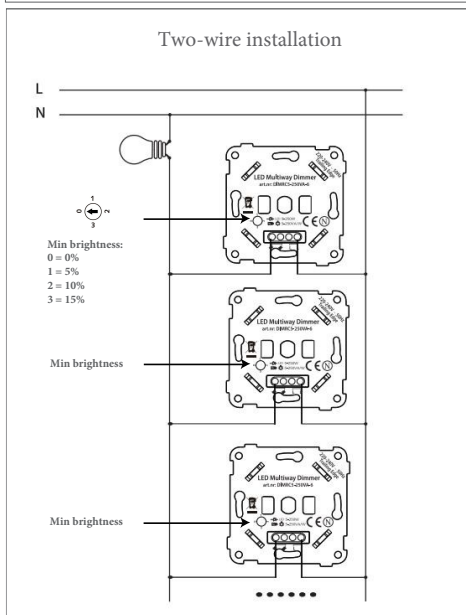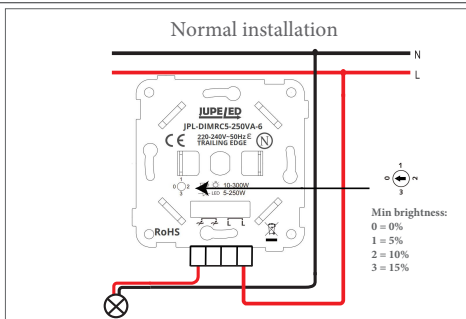

LED DIMMER SWITCH 5-250VA-6

Operating Voltage	220-240 V
Frequency	50 Hz
Maximum Load (LED)	250 VA
Maximum Load (others)	250 VA
Minimum Load	5 VA
Degree of protection	IP20
Size (without cover plate)	71 x 71 x 41 mm
Size (with cover plate)	84 x 84 x 43 mm
Mounting depth	23mm
Dimming method	Trailing edge (RC)
Protections	Short circuit-, overload- and thermal protection

No neutral conductor is required for installation.

The power factor of the luminaires must be taken into account when calculating the maximum load. Connection power = number of luminaires x luminaire power / power factor.

Dimmer is compatible with:

ABB Jussi and Impressivo
 Schneider Exxact
 Berker
 ELKO RS16

Two-wire installation

Based on normal step connection, the JPL-DIMRC5-250VA-6 dimmers can be used for the same light group by dimming the light group from several locations.